


Pompa tipo GS 16 - 25 - 40

Pump type GS 16 - 25 - 40





- 1 MANDATA
 - 2 ASPIRAZIONE
 - 3 FILTRO ASPIRAZIONE
-
- 1 SUCTION
 - 2 DISCHARGE
 - 3 INLET FILTER

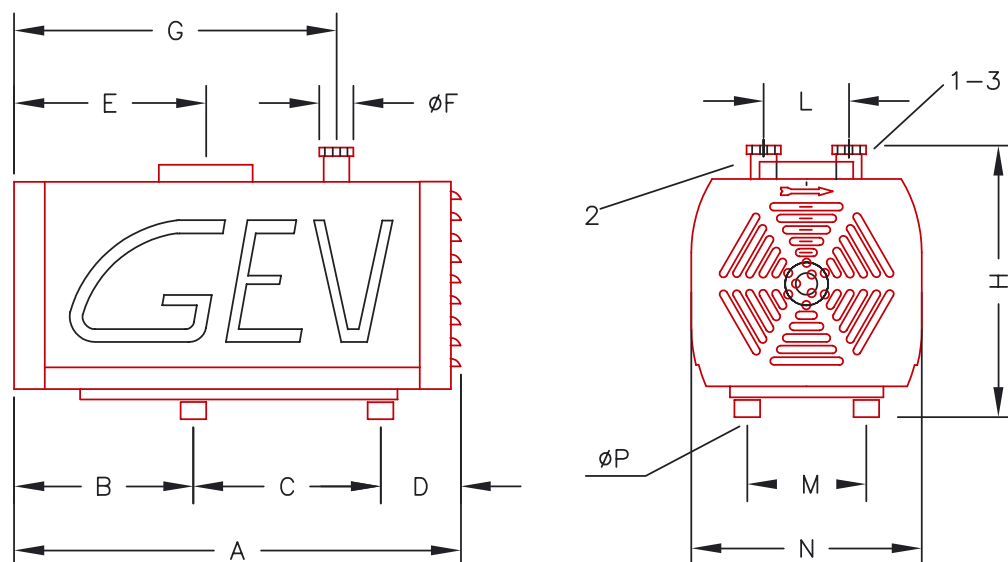

		Tipo di pompa/Frequenza Pump type/Frequency					
		GS 16 / 50Hz	GS 16 / 60Hz	GS 25 / 50Hz	GS 25 / 60Hz	GS 40 / 50Hz	GS 40 / 60Hz
Dimensioni (mm) Dimensions (mm)	A	524	524	524	524	524	524
	B	211	211	211	211	211	211
	C	220	220	220	220	220	220
	D	93	93	93	93	93	93
	E	235	235	235	235	235	235
	F	¾" G	¾" G	¾" G	¾" G	1" G	1" G
	G	385	385	385	385	385	385
	H	335	335	335	335	335	335
	L	100	100	100	100	100	100
	M	140	140	140	140	140	140
	N	270	270	270	270	270	270
	P	M8	M8	M8	M8	M8	M8

Le pompe vuoto a secco possono essere costruite anche come compressori o aspiranti/prementi.
 Oilless vacuum pumps can be manufactured also as compressor or suction/pressur pumps.

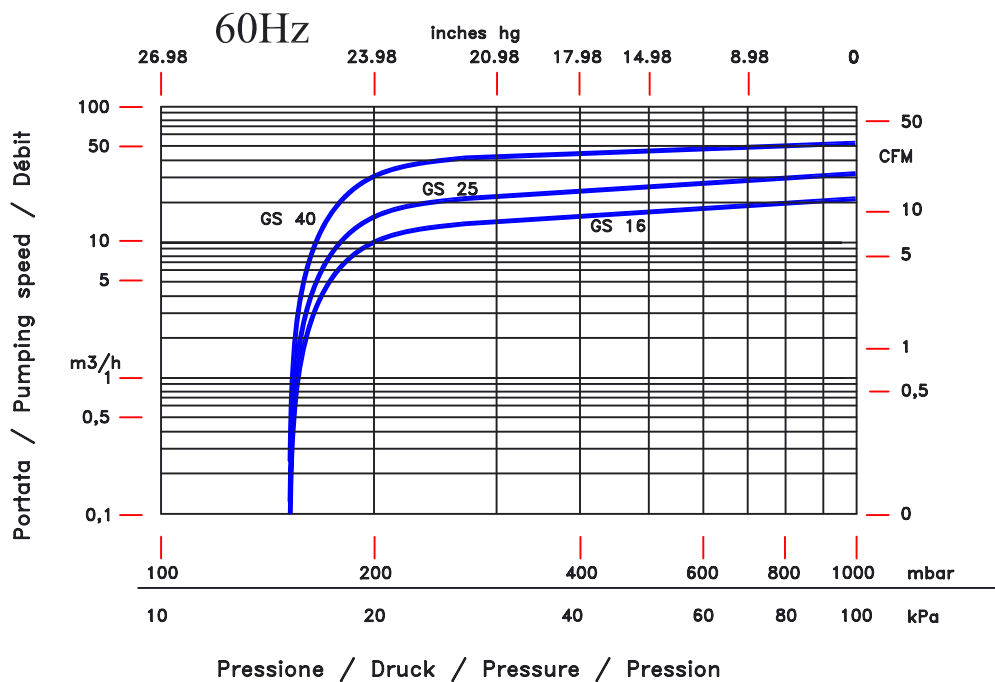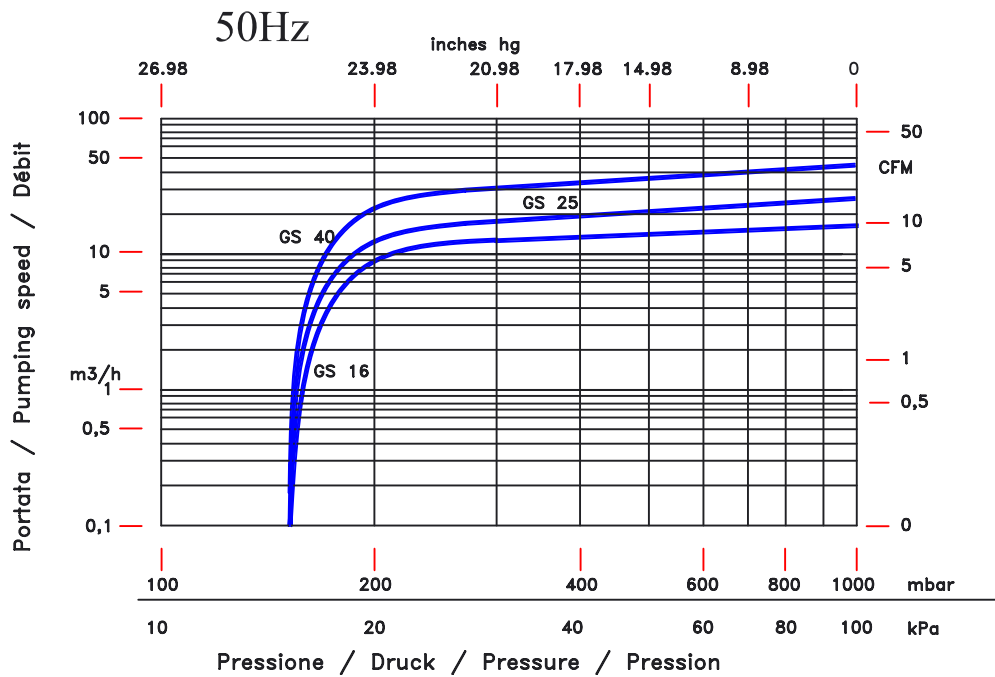

			Tipo di pompa/Frequenza Pump type/Frequency					
			GS 16 50Hz	GS 16 60Hz	GS 25 50Hz	GS 25 60Hz	GS 40 50Hz	GS 40 60Hz
Portata nominale	<i>Displacement</i>	m³/h	17,1	20,5	26,1	31,3	45	54
Vuoto finale	<i>Ultimate vacuum</i>	mbar	150	150	150	150	150	150
Rumorosità media	<i>Noise level</i>	db (A)	63	65	65	67	70	72
Tensione standard	<i>Standard voltage</i>	V	230/400	460	230/400	460	230/400	460
Potenza motore	<i>Motor power</i>	kW	1,1	1,1	1,1	1,1	1,5	1,5
Velocità di rotazione	<i>R.P.M.</i>	g/1'	1450	1750	1450	1750	1450	1750
Peso	<i>Weight</i>	kg	30	30	35	35	50	50